SUCCESS STORY






## CHASE Chemical Systems Engineering

Programme: COMET – Competence Centers for Excellent Technologies

Programme line: COMET-Zentrum (K1)

Type of project: Innovative process analytical technologies, 10/19 – 09/23, multi-firm MFP 2.2



Raman spectrometer including excitation laser, and computer in custom-made enclosure flushed with dry air

Measurement chamber

Extracted trends from Raman spectra

Continuously recorded data exemplarily shown for a 24h-time-window during the online implementation of the Raman sensor in the chemical recovery plant at Gratkorn, Austria.



On-line PAT implementation at plant and extracted trends (© CHASE/Wieland)

# CLOSING THE LOOP IN THE CHEMICAL RECOVERY OF THE PULP AND PAPER INDUSTRY USING RAMAN SPECTROSCOPY

DEMONSTRATION OF RAMAN SPECTROSCOPY AS VIABLE PAT-TOOL IN AN ON-LINE IMPLEMENTATION AT THE SAPPI GRATKORN MILL, AUSTRIA

Recovery of chemicals used in the solubilization of lignin from wood is a key process technology in the pulp and paper industry for ecological and economic reasons. The main chemical ingredient of the "cooking liquor" used in this solubilization is Mg(HSO<sub>3</sub>)<sub>2</sub>. To recover the SO<sub>2</sub> and MgO, the spent cooking liquor is incinerated. SO<sub>2</sub> is recovered from the hot flue gas in a cascade of Venturi scrubbers while MgO is washed and hydrated to form a Mg(OH)<sub>2</sub> slurry. Exposing the flue gas to the Mg(OH)<sub>2</sub> slurry, the magnesium bisulfite cooking liquor is formed in a 2-step reaction process. Conditions in these scrubbers are harsh (temperatures > 60 °C, pH in the range 4-7, high ionic strength). Together with complex interactions between gas phase and liquid media, these conditions lead to the formation of insoluble salts, which reduces the recovery efficiency, causes unscheduled downtimes, and increases maintenance costs.

An improved process understanding is needed to counteract these precipitations. Alongside a detailed thermodynamic modelling of the recovery process, Raman spectroscopy was employed as non-destructive, in-situ process monitoring tool investigating the chemical composition in the Venturi scrubbers to bridge the modelling approach with the real-world process. In combination with multivariate regression models, the spectral data is translated into critical process-relevant parameters. The harsh environment proves challenging, as most available chemical process probes cannot

Federal Ministry Republic of Austria Climate Action, Environment, Energy, Mobility, Innovation and Technology Federal Ministry Republic of Austria Labour and Economy

## SUCCESS STORY



withstand the process conditions, and those that do quickly degrade in industrial practice.

We demonstrate the applicability of Raman spectroscopy as a non-invasive on-line solution to this challenging PAT task. Raman spectroscopy proves its suitability for purpose, being able to monitor process parameters such as free SO<sub>2</sub>, total SO<sub>2</sub> and monosulfite (see figure 1) in real-time – parameters that are crucial for process control, and presently routinely determined by manual sampling and titration.

Raman spectra collected along the Venturi chain show concentration profiles matching established off-line titration. The subsequent test-wise on-line implementation in a Venturi scrubber at the plant highlighted the method's potential as an efficient and effective tool for process monitoring and optimization. Accurate real-time monitoring allows to control the process in a way that avoids precipitation of insoluble salts, hence, reducing the loss in chemicals and ensuring continuous operation with reduced risk of unscheduled downtimes.

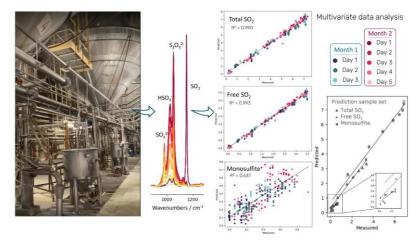


Figure 1: Raman spectra were collected along the chemical recovery chain (cascade of Venturi scrubbers). Different components in the scrubber media are **identified** via their distinct spectral fingerprint. **Multivariate data analysis** allows determination of several target variables (total SO<sub>2</sub>, free SO<sub>2</sub>, monosulfite) from a single Raman spectrum. Cross-validation and prediction results of the multivariate model based on at-line measurements yield a **reliable model performance**.

Project coordination (Story) DI Dr. Karin Wieland Area Manager CHASE GmbH T +43 664 8568532 karin.wieland@chasecenter.at

#### Competence Center CHASE GmbH Hafenstraße 47-51

4020 Linz T +43 664 9658923 patrick.pammer@chasecenter.at www.chasecenter.at

### **Project partner**

• Sappi Europe, Gratkorn, Austria • TU Wien, Austria

This success story was provided by the centre management and by the mentioned project partners for the purpose of being published on the FFG website. CHASE is a COMET Centre within the COMET – Competence Centers for Excellent Technologies Program and funded by BMK, BMAW and the provinces Upper Austria and Vienna. The COMET Program is managed by FFG. Further information on COMET: www.ffg.at/comet

Federal Ministry Republic of Austria Climate Action, Environment, Energy, Mobility, Innovation and Technology Federal Ministry Republic of Austria Labour and Economy Austrian Research Promotion Agency Sensengasse 1, A-1090 Vienna P +43 (0) 5 77 55 - 0 office@ffg.at www.ffg.at